

# VCL-E1oP (2E1 Port FE Version)

# 2E1 over Packet / TDM over IP

#### **Product Overview**

Orion's 'VCL-E1oP' E1 over Packet (2 E1 Port FE Version) TDM over IP equipment supports transmission of up to 2 x E1 links over IP / Ethernet, MEF or MPLS Pseudo-wire networks.

The 'VCL-E10P' E1 over Packet (2 E1 Port FE Version) TDM over IP equipment, equipped with a powerful ARM-Cortex Processor which provides a highly reliable clock recovery mechanism for low jitter and wander control, even under variable network conditions.

2 x E1 Port E1oP (E1 over Packet) TDM over IP equipment is available with various Electrical (10/100BaseT) and Optical (100BaseFX) Ethernet port options which allow the users to implement 1+1 add-drop (Drop-Insert), Ethernet link redundancy (using Port Trunking / Port Bonding) and 802.1p based QoS mechanisms for network optimization.

The 'VCL-E1oP' E1 over Packet (2 E1 Port FE Version) TDM over IP equipment also optimizes on the network usage, such that the bandwidth used by the E1oP equipment on the packet network is limited to the corresponding to the number of E1 ports and the time-slots that are being transported over the Ethernet / packet network.



## Purpose of TDM over Packet technology

Telecom companies and enterprise users can save significant network and equipment cost and generate additional revenue by offering different types of services over a single packet-switched infrastructure by the use of E1oP equipment. The E1oP equipment is also suitable for connecting to Ethernet / packet wireless equipment to achieve fast deployment of E1 services over wireless Ethernet networks. One particular application is to build E1 links with low cost Wireless LAN bridges, replacing expensive TDM/E1 microwave radios.

The 2 x E1 over Ethernet (VCL-E1oP) multiplexer may be used to provide legacy TDM services over Ethernet optical fiber, or wireless Ethernet/IP networks.

# How the TDM over Packet (2 E1 Port FE Version) equipment works

The E1 data streams received on the E1 interfaces are converted by the E1oP engine of the E1oP equipment to Ethernet data packets (of a fixed size) and transported over the Ethernet network with UDP / IP, MEF or MPLS headers. At the receiving end the E1oP reconstructs the original data streams by removing the IP, MEF or MPLS headers and converts the Ethernet data packets back to E1 frames using highly reliable and accurate clock recovery mechanism. The 'VCL-E1oP' (2 E1 Port FE Version) offers the user a choice of standard, E1 to packet and packet to E1 conversion mechanisms that include SAToP and CESoPSN technologies.

## **Hardware Highlights**

- √ 19-Inch rack mountable
- ✓ 1U form factor (44mm)
- 1+1 Redundant Power Supplies, AC and DC, or AC plus DC.
- Redundant power supply inputs.
- ✓ Extended Temperature Range: (-20°C to +60°C)
- ✓ EMI / EMC Complaint
- Real Time battery backed clock with life in excess of 10 Years
- ✓ Power over Ethernet (PoE) Optional

## E1 Clock recovery and synchronization techniques:

- Adaptive Clock Recovery (ACLK)
- Recovered Clock (RCLK) / Loop-Timed Clock
- Asymmetrical (One-Clock and Two-Clock) Clock
- Synchronization to an External Clock (ECLK)
- Synchronization to an Internal Clock
- Automatic clock priority selection with fall back
- Plesiochronous Clocking.

#### Key Features - E1 and E1oP Interface

- Supports 2 independent E1 interfaces
- Internal, External, Adaptive, Recovered clock and Asymmetrical (One-Clock and Two-Clock) options for the E1 TDM port synchronization. Automatic clock priority selection with fall back
- Supports CESoPSN payload mechanism to support the fractional E1 with data rate of 64Kbps to 2.048Mbps (DS0 timeslot level). User configurable data rate from 64kbps to 2048kbps. in steps of 64kbps
- CESoPSN payload mechanism feature allows the user to optimize the packet switched network by limiting its usage to the corresponding number of time slots carried by an E1 channel
- Supports SAToP payload mechanism to transport full E1 (transparent to the structure of the TDM frame useful for transporting framed / unframed E1 channels)
- Supports IETF-PWE3 (pseudo-wire) transport mechanism
- Supports IP, MPLS and MEF8 (Metro-Ethernet) tagging
- Supports three E1 framing modes Framed, Unframed and Multi-framed with CAS signaling
- Supports network latency / packet delay variation / jitter buffer of up to 512ms
- Absolute and Differential timestamps
- Jitter and Wander conforms to G.823 / G.824 and G.8261 and TDM specifications
- 120 ohms balanced E1 interfaces. Optional 75 Ohms BNC interface (120 Ohms to 75 Ohms cables provided)
- E1 local and remote loop-back (RLOOP) facility for testing and diagnostics.

## Key Features - Ethernet / IP Network Interface

- Optical SFP based (100Base-FX) and Electrical (100Base-T) Ethernet port and PoE options
  - > 4 x 10/100BaseT Copper Ports.
  - 2 x 10/100BaseT Copper Ports, 2 x 10/100BaseT Ports with PoE.
  - 2 x 100BaseFX Optical Fiber Ports, 2 x 10/100BaseT Copper Ports.
  - 2 x 100BaseFX Optical Fiber Ports, 2 x 10/100BaseT Ports with PoE.
    - (may use any one combination of above mentioned Ethernet Ports)
- Power over Ethernet (PoE) (available options as above).
   Meets and exceeds the Telcordia GR-1089-CORE Lighting and Power Contact Protection requirements.
- Point-to-point and point-to-multipoint applications based on IP addressing.
- Supports drop and insert applications.
- 1+1 Ethernet Link Redundancy / Redundant Link Protection.
- Supports QoS, 802.1q and 802.1p based packet priority.
- Q-in-Q Tagging.
- Flow Control in an Ethernet Packet Networks: (Regulating Traffic)
- Port / Customer based bandwidth allocation (Port Rate Limiting Ingress and Egress)
- DSCP and 802.1Q / 802.1p based packet tagging and prioritization
- MPLS, MEF and UDP tagging for Ethernet traffic.
- Separate IP Address for TDM traffic and equipment management
- VLAN tagging for TDM traffic and equipment access / management
- User configurable MTU (E1oP payload) packet size up to 1500 Bytes.
- 802.1Q Tag based VLANs Supports 1-4095 VLAN Ids.

- Supports Packet priority assignment (IP Diffserv / DSCP).
- UDP-specific "Special" Ethernet type.
- In band VCCVARP.
- Broadcast DA.

#### **Key Features explained:**

- VLAN Based Priority (Classifying Services) VLAN
  based Priority feature allows the user to assign priorities to
  different VLANs carrying various types of services / traffic
  according based on user categories and preferences. The
  user may assign highest priority to TDM (E1/E3) traffic and
  Ethernet services on a lower priority. User may also configure
  which TDM link should be given preference over the other
  TDM links when the uplink bandwidth falls below a particular
  threshold.
- Flow Control in an Ethernet Packet Networks: (Regulating Traffic) - Flow Control feature allows the user to regulate the Ethernet traffic flow to minimize packet loss due to data bursts.
- Port / Customer based bandwidth allocation (Port Rate Limiting) - Port based Ingress and Egress Ethernet Rate Limiting allows the use to assigne the bandwidth as per port / service requirements in addition to provisioning traffic by using 802.1Q and 802.1p VLANs and packet priority.

# Key Features - System Management, Monitoring and Alarm Interfaces

- External Alarm Dry contact relay alarms are also available at rear of the system to connect the system to an external alarm.
- NMS (Network Management System) to monitor multiple units from single Central Location.
- Supports system temperature monitoring with High Temperature threshold and Low Temperature threshold alarms and SNMP Traps.
- Supports SNMP V2 Monitoring and Traps.
- Self-test for checking system errors upon system bootup.
- Event Logging.
- Clock Performance Alarms.
- Network Performance Alarms.
- Network Performance Monitoring and Diagnostics.
- Online / remote upgrade of firmware.

#### **OAM: Operation and Management Ports**


- RS232 (DB9) Serial Port.
- 10/100BaseT Ethernet Management for In-band remote access.

#### System Access, Control and Management Options

- Telnet.
- CLI Control Interface (HyperTerminal or Vt100).
- SNMP V2 Traps (MIB File provided).
- Windows based GUI (Graphical User Interface) for easy configuration, management and access. Ability to monitor multiple units from a single NMS.
- Password Protection.

#### E1oP in Cellular Backhaul FΕ VCL-E1oP 2E1 / 4E1 2G **BTS** FΕ (3G / LTE) E1 2E1 **MSC BTS** (2G) GE MPLS/IP/MEF **Network** VCL-E1oP 32 E1 GE GE **BTS** RNC (3G / LTE) GE 3G/LTE VCL-E1oP 8E1 8E1 **BTS**

## Typical Application Diagram in Wireless Network

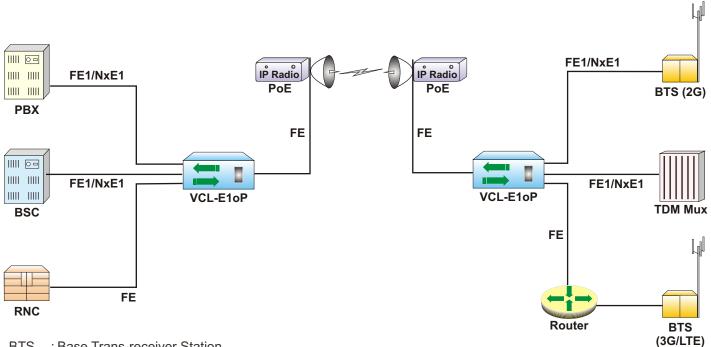

BTS : Base Trans-receiver StationMSC : Master Switching Center

RNC : Radio Network Controller
LTE : Long Term Evolution


FE1 : Fractional E1
FE : Fast Ethernet

GE : Gigabit Ethernet


PoE : Power over Ethernet


(2G)

# Typical Application in Wireless Network - 1+1 Link Redundancy

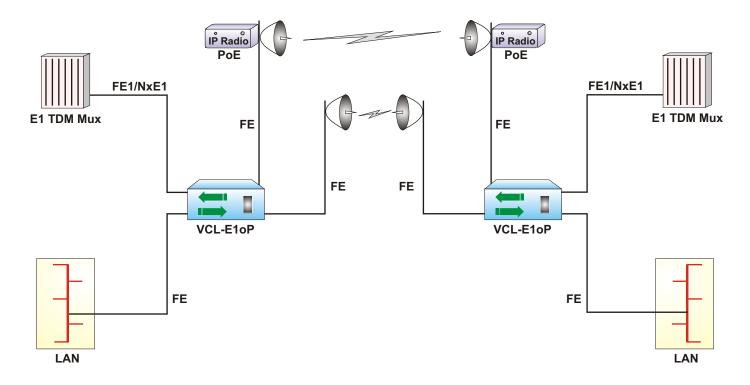


# TDM over IP / Ethernet - Providing 2G/3G/LTE over an IP Cloud

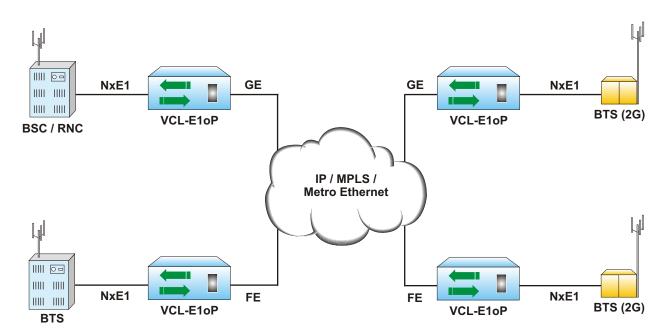

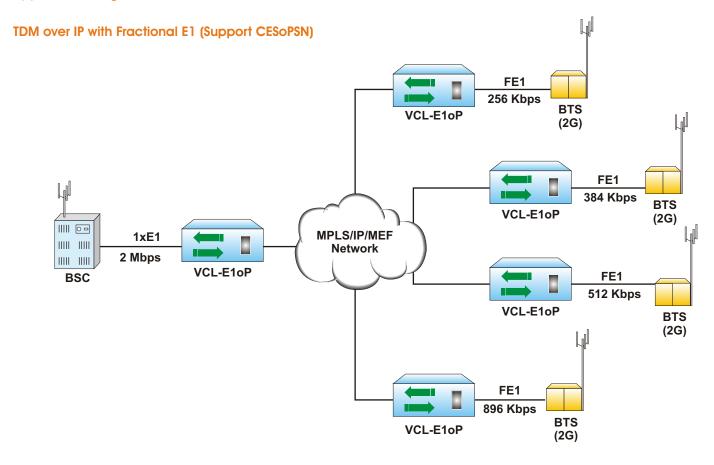


# TDM over IP / Ethernet - VLAN Based Priority (Classifying Services)

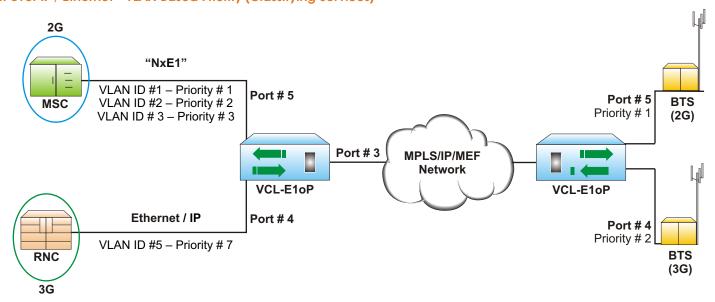

#### Notes:

- VLAN based Priority feature allows the user to assign priorities to VLANs carrying different types of services / traffic according based on user preferences.
- The user may configure the TDM traffic on highest priority and Ethernet service (3G data network) on a lower priority. User may also configure which TDM link should be given preference over the other TDM links when the uplink bandwidth decreases below a particular threshold.

# TDM over IP / Ethernet Port / Customers based bandwidth allocation (Port Rate Limiting)

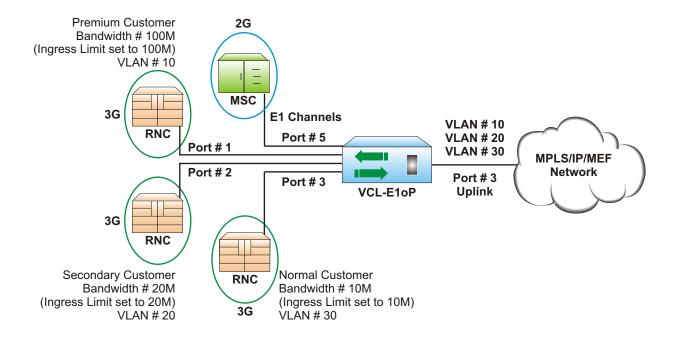

**Notes:** Port based Ingress Ethernet Rate Limiting allows the service provider to assigned the bandwidth as per customer requirements and separating their traffic by assigning 802.1Q based VLANs.

# **Technical Specifications**

# **E1oP Specifications**

Max number of E1 Ports	Number of Ports 2
Max number of logical links	Up to 24
Synchronization clock	- Adaptive Clock Recovery
recovery	recovery (ACLK) Options
	- Recovered Clock (RCLK) /
	Loop-Timed Clock
	- Asymmetrical (One-Clock
	and Two-Clock) Clock
	- Synchronization to an
	External Clock (ECLK) and
	an Internal Clock
	- Automatic fall back
Maximum number of	4 Fast Ethernet ports
Ethernet Ports	
Supported Transport	ETF-PWE3, SAToP and
Mechanisms	CESoPSN
Supported PSN (Packet	UDP, IP, MPLS and MEF
Switched Networks) type	
QoS	802.1p packet priority

### E1 Interface

Number of Ports	Number of Ports 2
	(supporting 64Kbps upto
	2.048Mbps on each port)
Framing Formats	Unframed, framed and Multi
	-frame (with or without CRC-4)
Line Coding	HDB3
Compliance	ITU-T G.703, G.704, G.706
	and G.732
Jitter and Wander	Complies to ITU-T G.823,
	G.824
Line Impedance	120 Ohms balanced
	- Optional 75 Ohms
Protection	<ul> <li>Optional Metallic and</li> </ul>
	Longitudinal Protection
	- ESD protection

#### **Power Consumption**

Power Consumption	<15 Watts (without PoE)
	PoE 40 Watts per channel

# **Power Supply Options**

- Dual Redundant
- 1+1 AC power (100 to 240V AC, 50/60 Hz)
- 1+1 DC (-48V) power (40 to 72V DC)
- 1+1 DC (-24V) power (18 to 40V DC)
- AC plus DC (AC + DC), AC or DC
- EMI/EMC compliant.

#### **Ethernet Interface**

Number of Ports	- Optical SFP based
	(100Base-FX) and Electrical
	(100Base-T) Ethernet port
	and PoE options
	<ul> <li>4 x 10/100BaseT Copper</li> </ul>
	Ports
	- 2 x 10/100BaseT Copper
	Ports, 2 x 10/100BaseT
	Ports with PoE
	- 2 x 100BaseFX Optical Fiber
	Ports, 2 x 10/100BaseT
	Copper Ports
	- 2 x 100BaseFX Optical Fiber
	Ports, 2 x 10/100BaseT
	Ports with PoE.
(may use any one comb	ination of above mentioned

(may use any one combination of above mentioned Ethernet Ports)

Electrical	10/100 Auto-negotiation/MDI-X
	(Auto-sensing), Full-Half
	Duplex, RJ45 Electrical
	Connector, PoE (Power of
	Ethernet) option on
	2 x 10/100BaseT Ports
Protection	ESD protection
Optical	100Base-FX (Fast Ethernet),
	SFP
Power over Ethernet (PoE)	40 Watts per port
PoE Protection	Complies with Telcordia GR-
	1089-CORE Issue 6
	Specifications and ITU-T K.44
	(2012*) specifications
Maximum Frame Size	1500 Bytes

# 100BaseFX (Optical) Ethernet Specifications

	•
Туре	SFP
Compliance	- MSA Compliant
	- RoHS
	- EMI
	- ESD
	- DDM
Safety	Class 1 Laser Safety/
	IEC-60825 Compliant
Bit Rate	100 Mbps
Wavelength	1310 / 1550 nm
Distance	550m to 120Kms, as per order
Optical Connector	LC

**Note:** \* Excludes 0.76A (300 Ohms) and 0.38A (600 Ohms) and 0.23 (1000 Ohms) AC Power Cross.

## **Command Language**

- Windows based GUI (Graphical User Interface).
- Command Line Interface (English text commands).

# Management and Control Interfaces

- COM Port (RS232 Serial Port).
- 10/100BaseT Ethernet Port (each multiplexer may be assigned an IP address and connected to a LAN / IP network for remote access and management through the 10/100BaseT Ethernet Port for out-of-band configuration, management and access).
- Telnet.
- SNMP, V2.
- Additionally, a Windows based GUI (Graphical User Interface) for easy configuration, management and access.

# **AC Power Supply Specifications**

Input AC Voltage	110 / 220 Volts AC
Range of input AC Voltage	100 V to 240 V AC,
	50Hz/60Hz.
AC Input Connector	IEC Connector

### **24V DC Power Supply Specifications**

Power Supply	24V DC
Range of input	18V to 40V DC
Input voltage reversal protection	Provided
Under voltage protection	< 4.85V
Over voltage protection	> 5.15V
Efficiency at full load	> 90% @ 5V/4A
	(when input voltage-24V)
Ripple at full load	< 5mVrms
Spike at full load	< 50mV

## **48V DC Power Supply Specifications**

Power supply	-48V DC
Range of input	-40V DC to -72V DC
Under voltage protection	< 4.85V
Over voltage protection	> 5.15V
Efficiency at full load	> 91% @ 5V/2A
	(when input voltage -48V)
Ripple at full load	< 5mVrms
Spike at full load	< 50mV

#### **Environment**

Temperature	-20°C ~ +60°C for
	Operation
Humidity	5% to 95% (at 35°C)
	Non-condensing

## **Regulatory Compliance**

- Safety IEC 60950 Safety IEC 60950
- CE
- RoHS
- Complies to ANS/IEC standards
- Complies with Telecom Part 68, FCC Part 15 and CISPR 22 Class A
- EMC EN55022: 1998 + A1 and A2
- EMC EN55024.
- Operation ETS 300 019 Class 3.2
- Storage ETS 300 019 Class 1.2
- Transportation ETS 300 019 Class 2.3

## NMS (with Telnet) OAM port Specifications

Network Interface	RJ-45 Ethernet 10BaseT or
	100BaseT-TX (auto sensing)
Compatibility	Ethernet Version 2.0
	IEEE802.3
Protocols supported	ARP, UDP/IP, TCP/IP, Telnet,
	SNMP
Management	SNMP, Serial login, Telnet login

#### **External Alarms**

- Dry Contact Relay 2 Form C
- Rated upto 72V DC, 1 Amp.

#### Chassis

- 1U High (44mm)
- 19-inch rack-mounting shelf
- Also available in Desktop / Table Top Version.

#### **Mechanical Specification**

Height	44 mm (1U)
Depth	260 mm
Width	480 mm (19 inch rack mountable)
Weight	3 Kgs.

# **Ordering Information**

S. No.	. Part #	Product Descriptions	Remarks
1	VCL-E10P-2E1 FE-4EE-2130	VCL-2E1 over Ethernet Multiplexer (TDM over IP) 19-inch 1U High Rack Mount version Supports: - Upto 2 x E1 [RJ45 (F)] - 4 x Ethernet Ports [100Mbps, Electrical RJ45 (F)] - 1 x System Core Cables, Installation Accessories, Documentation, System User Manual / Disk (Set) - OAM [SNMP, Telnet (RJ45 Port) and Serial Port (DB-9 COM Port)] * Add Power Supply Option from below	CORE UNIT without PSUs.
2	VCL-E1oP-2E1 FE-2OE-2130	VCL-2E1 over Ethernet Multiplexer (TDM over IP) 19-inch 1U High Rack Mount version Supports: - Upto 2 x E1 [RJ45 (F)] - 4 x Ethernet Ports (100Mbps) - 2 x Electrical Ethernet Ports [RJ45 (F)] - 2 x Optical Ethernet Ports [SFP based / without SFPs] - 1 x System Core Cables, Installation Accessories, Documentation, System User Manual / Disk (Set) - OAM [SNMP, Telnet (RJ45 Port) and Serial Port (DB-9 COM Port)] * Add Power Supply Option from below	
3	VCL-E1oP-2E1 FE-2PE-2130	VCL-2E1 over Ethernet Multiplexer (TDM over IP)  19-inch 1U High Rack Mount version Supports:  - Upto 2 x E1 [RJ45 (F)]  - 4 x Ethernet Ports (100Mbps)  - 2 x Electrical Ethernet Ports [RJ45 (F)]  - 2 x Power over Ethernet (PoE) Ports [RJ45 (F)]  - 1 x System Core Cables, Installation Accessories, Documentation, System User Manual / Disk (Set)  - OAM [SNMP, Telnet (RJ45 Port) and Serial Port (DB-9 COM Port)]  * Add Power Supply Option from below	
-1-1-6	2010		
1	OCXO option if requi	Add High Stability Timing, Ultra Low Noise OCXO (oven-controlled crystal oscillator) optional	ОСХО
Power	Supply Options		
1	AC220	1 x 100-240V AC Power Supply Input	Any One Option.
2	DC048	1 x (-) 48V DC Power Supply Input	Any One Option.
3	ACDC	1 x 100-240V AC Power Supply Input	
		1 x (-) 48V DC Power Supply Input	
4	AC220R	2 x 100-240V AC Power Supply Input [Redundant] 2 x (-) 48V DC Power Supply Input [Redundant]	
5	DC048R		

## **Gigabit Ethernet SFP Options**

1	VCL-EMOD 0193	155Mbps SFP Transceiver Fast Ethernet Duplex LC, 1310nm, 15km, SMF	Maximum 2 SFPs per
2	VCL-EMOD 0194	155Mbps SFP Transceiver Fast Ethernet Duplex LC, 1310nm, 40km, SMF	CORE UNIT As per
3	VCL-EMOD 0217	155Mbps SFP Transceiver Fast Ethernet Duplex LC, 1550nm, 80km, SMF	Site Requirement.
4	VCL-EMOD 0156	155Mbps SFP Transceiver Fast Ethernet Duplex LC, 1550nm, 120km, SMF	
5	VCL-EMOD 0243	155Mbps SFP Transceiver Fast Ethernet Duplex LC, 1550nm, 150km, SMF	
6	VCL-EMOD 0171	155Mbps SFP Transceiver Fast Ethernet Duplex LC, 1550nm, 200km, SMF	

#### **Cables and Accessories Options**

1	VCL-HRNS 1280	1E1 75 Ohms Connectorized Cable [RJ45M-2BNCF, 28cm]	As per Site
2	VCL-HRNS 1229	Optical Patch Cord Connectorized Cable [2LC-2LC, 3m, SM]	Requirement.
3	VCL-HRNS 1238	Optical Patch Cord Connectorized Cable [2LC-2LC, 10m, SM]	] .
4	VCL-HRNS 1242	Optical Patch Cord Connectorized Cable [LC-FC, 10m, SM]	
5	VCL-HRNS 1243	Optical Patch Cord Connectorized Cable [2LC-2FC, 10m, SM]	
6	VCL-HRNS 1239	Optical Patch Cord Connectorized Cable [LC-SC, 10m, SM]	
7	VCL-HRNS 1258	Optical Patch Cord Connectorized Cable [2LC-2SC, 10m, SM]	
8	VCL-ECON 1172	Connector (Attenuator LC-LC (10 db.))	
9	VCL-ECON 1173	Connector (Attenuator LC-LC (20 db.))	
10	VCL-ECON 1186	Connector (Attenuator FC-FC (10 db.))	
11	VCL-ECON 1187	Connector (Attenuator FC-FC (20 db.))	
12	VCL-ECON 1197	Connector (Attenuator SC-SC (10 db.))	
13	VCL-ECON 1198	Connector (Attenuator SC-SC (20 db.))	

Note: 1. SPFs to be added if 100BaseFX (Optical) Ethernet Ports are required.

- 2. Redundant power supply to be added, if required.
- 3. Select VCL-HRNS 1280 for E1 75 Ohms BNC (F).

Technical specifications are subject to changes without notice. All brand name and trademarks are the property of their respective owners. Revision 1.8, Jan 10, 2024

Headquarters: Phoenix, Arizona

Orion Telecom Networks Inc. 20100, N 51st Ave, Suite B240, Glendale AZ 85308 Phone: +1 480-816-8672 Fax: +1 480-816-0115 E-mail: sales@oriontelecom.com Regional Office: Miami, Florida

Orion Telecom Networks Inc. 4000 Ponce de Leon Blvd. Suite 470, Coral Gables, FL 33146 U.S.A. Phone: 1-305-777-0419, Fax: 1-305-777-0201

Fax: 1-305-777-0201 E-mail: sales@oriontelecom.com